



## Thermio 103E Room Thermostat

### SPECIFICATION SHEET



Electronic control with digital temperature indicator (actual and desired temp.), with power stealing  
No battery required,  
Surface-mounting

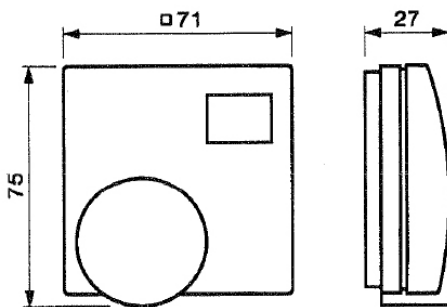

Dimensions (mm)	75 x 71 x 27
Weight (g) approx.	60
Connection	2-wire
Power consumption	100 mW
Switching capacity - Ohmic load - Inductive load cos φ 0,6 - minimal	20 mA /24 V
Switching output	opens with raising temperature
Switch contacts	-
Ambient temperature	T 30
Switching state display - Control - Selector switch	sign of flame - -
Assembling mode	wall mounting
Connection type	screw terminal with wire protection
Control range of day temperatures	+5°C bis +30°C
Night lowering device	-
Antifreeze	-
Differential gap of temperature	approx. 0,5 K
Stocking temperature	-20°C bis +70°C
Protection class	II after accordant installation
Protection type	IP 20
Fault clearance of sparks	acc. to EN 55014