

## Towerstat STTRCSN (Heating & Cooling)

### Tower Controls

**SWITCH ON  
TO COMFORT**

#### The New Tower Heat-Cool Room Thermostat


- Simple 3-wire connection (neutral required)
- New or existing installations
- Suitable for use with all mains-operated systems
- Fits standard pattress box
- Neon indicator



- Size: 82 x 82 x 33
- Range: 5 – 35°C
- Frost protection setting
- Differential: 1°C
- Double insulated
- Switch type: single pole change-over
- Rating:
  - Break on rise heating contact (1 – 3): 10A at 240v AC (2A inductive)
  - Make on rise cooling contact (1 – 2): 3A at 240v AC (1A inductive)
- Recommended for installation by a qualified electrician

#### Electrical connection:

Neutral must be connected for correct temperature regulation

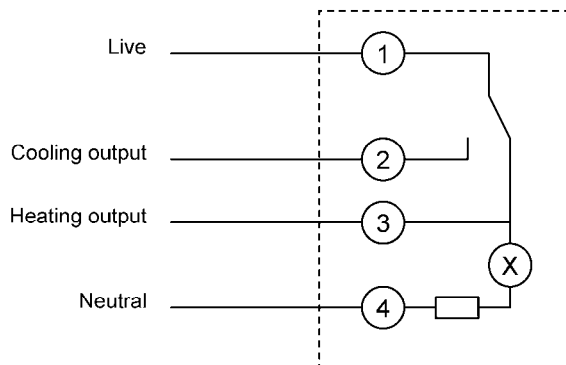

The Tower Heat-Cool thermostat is a bi-metal temperature regulating device. The unit is fitted with an accelerator heater to give a close differential for accuracy of temperature control. A neutral connection must be fitted and the device is for mains operation only.