



Tower 2-port motorised valves are designed to provide zone control for heating or hot water.

There are two versions, for either 22mm or 28mm pipework.

Compression fittings are supplied.

These valves have a replaceable actuator head, which can be exchanged without needing to drain-down the system.



A2PORT Actuator



SYNABOXED Synchronous Motor

PRODUCT DATA SHEET


TOWER 2-PORT MOTORISED VALVE

PRODUCT CODE: VAL222MV
VAL228MV



Technical specification:

- Synchronous motor drive / spring return action.
- 1m 5-core flex.
- Industry standard flex colours: brown; blue; grey; orange; green/yellow
- Auxiliary switch
- Switch rating 3A resistive
- Integrated manual lever for commissioning purposes.
- Supply 230V 50Hz / power consumption 6W
- Operating temperature range: +5 to 88°C
- Maximum differential pressure 1 Bar
- Maximum static pressure 10.0 Bar

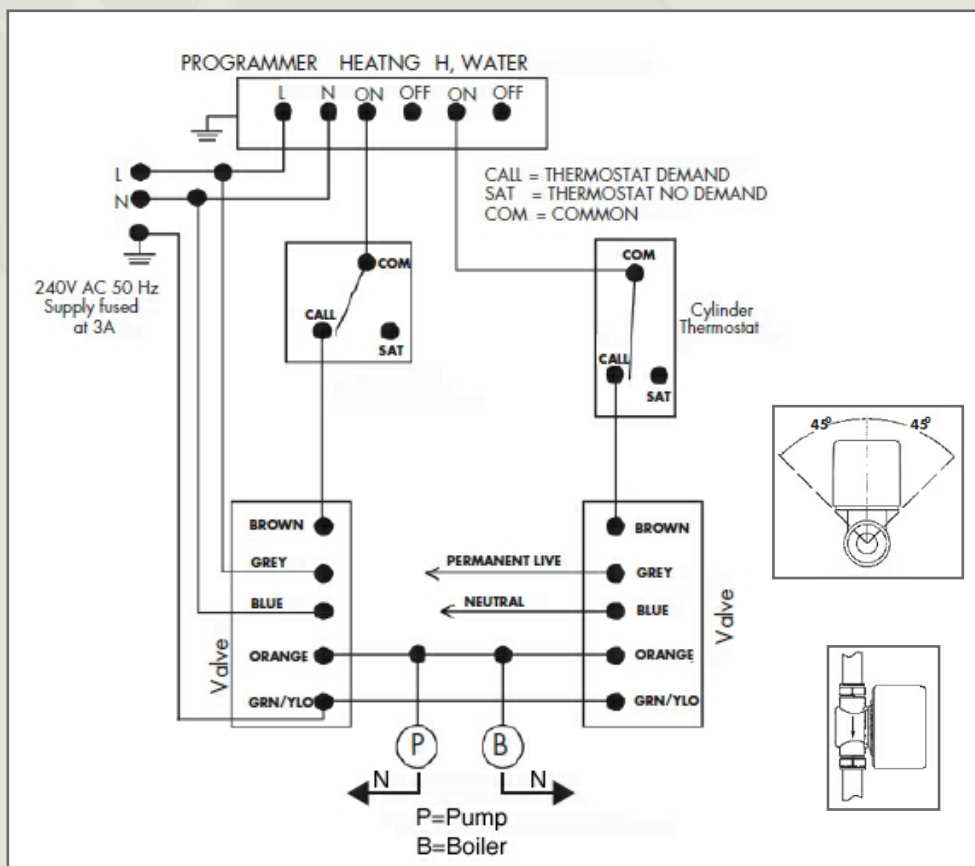

TFC GROUP LLP

2 PORT MOTORISED ZONE VALVE 22mm & 28mm



Cert No: RS 30178
QR057

TFC GROUP LLP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 Fax: 01732 354445 www.tfc-group.co.uk

Prepared for TFC Group LLP By: M. Edmonston

Issue 1: July 2018

Page 1 of 1