



Tower 3-port motorised valves are designed to provide control for heating and hot water.

There are two versions, for either 22mm or 28mm pipework.

Compression fittings are supplied. These valves have a replaceable actuator head, which can be exchanged without needing to drain- down the system.

When installed with suitable room and cylinder thermostats, provides automatic regulation of heating and hot water; mid-position when both services are required.



A3MID Actuator



SYNABOXED Synchronous Motor

**PRODUCT DATA SHEET**


**TOWER 3-PORT MID-POSITION VALVE**

PRODUCT CODE: VAL322MP  
VAL328MP



**Technical specification:**

- Synchronous motor drive / spring return action.
- 1m 5-core flex.
- Industry standard flex colours: white; blue; grey; orange; green/yellow
- Auxiliary switch
- Switch rating 3A resistive
- Integrated manual lever for commissioning purposes.
- Supply 230V 50Hz / power consumption 6W
- Operating temperature range: +5 to 88°C
- Maximum differential pressure 1 Bar
- Maximum static pressure 10.0 Bar

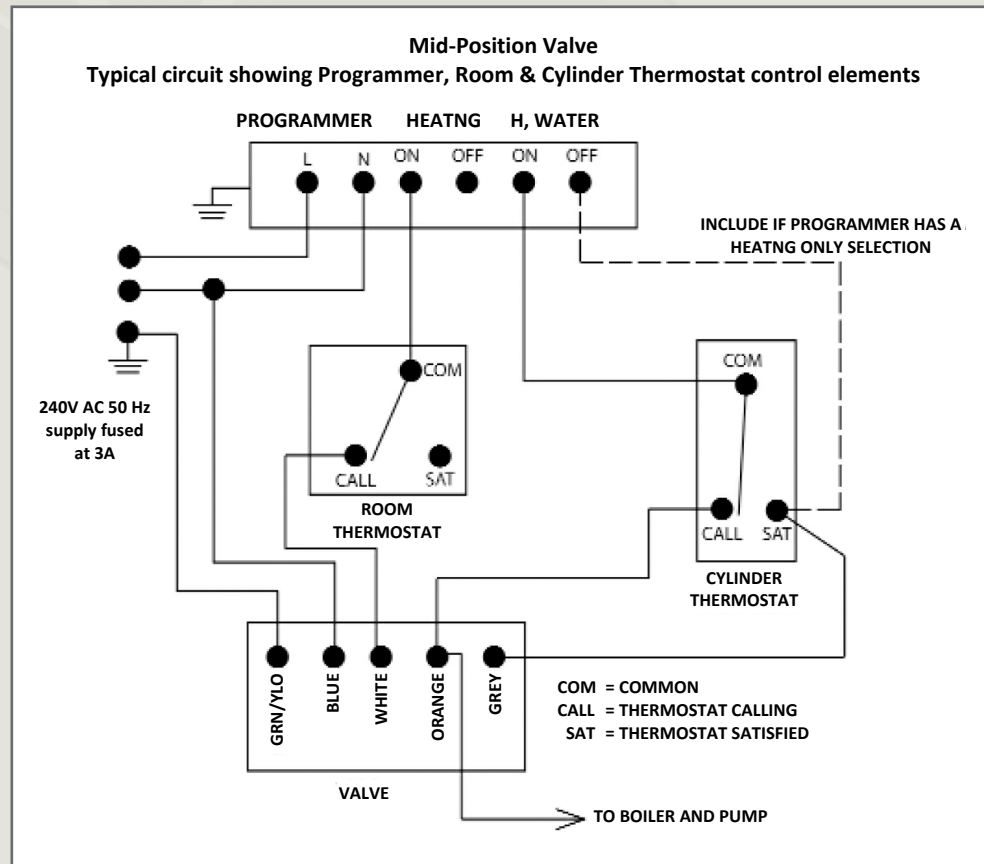

**TFC GROUP LLP**

**MID-POSITION MOTORISED VALVE 22mm & 28mm**



Cert No: RS 30178  
QR057

TFC GROUP LLP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 Fax: 01732 354445 www.tfc-group.co.uk

Prepared for TFC Group LLP By: M. Edmonston

Issue 1: July 2018

Page 1 of 1