




PRODUCT DATA SHEET

WHITE STRAIGHT MANUAL RADIATOR VALVE / LOCKSHIELD

PRODUCT CODE: **LS1ST**

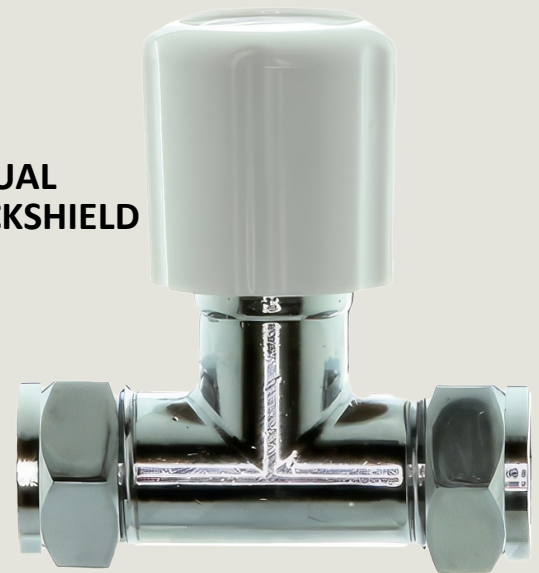

Features

LS1ST Straight Manual Radiator Valve with White Wheelhead

The LS1ST manual radiator valve is suitable for use in fully pumped systems up to 10 bar static pressure.

- Body can be mounted vertically or horizontally
- Can be used with Tower radiator thermostats
- 15mm compression fittings
- Supplied with 1/2" BSP Tailpiece
- Supplied with witches hat for lockshield applications
- Robust high quality chrome finish
- Dual function, can be used as lockshield or wheel head
- Flow Direction Arrow

Code: **LS1ST**

Application

The LS1ST straight (inline) manual radiator valve can be used as a lockshield or wheelhead.

Suitable for fully pumped systems up to 10 bar static pressure.

Specification

Max Flow Temp	: 90°C (194°F)
Max working Pressure	: 10bar (150psi)
Radiator connection	: 1/2" BSP
Pipework connections	: 15mm Compression

TFC GROUP

WHITE STRAIGHT MANUAL RADIATOR VALVE



Cert No: RS 30178
QR057

TFC GROUP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 Fax: 01732 354445 www.tfc-group.co.uk

Prepared for TFC Group By: M. Edmonston

Issue 1: July 2023

Page 1 of 1