



PRODUCT DATA SHEET

OP - DIN

24 HOUR / 7 DAY DIGITAL
TIME SWITCH

230V 50Hz OPERATION

DIN-RAIL MOUNTING



SPST SWITCHING

VOLT-FREE N/O CONTACTS



OP-DIN IS A SINGLE-MODULE DIGITAL DIN-RAIL TIMER, WITH L.C.D. AND 7 DAY / 24 HOUR PROGRAMMING CAPABILITY. THERE ARE 6 ON AND 6 OFF PROGRAMME SPACES. THE TIMER HAS A RE-CHARGEABLE CELL PROVIDING BATTERY BACK-UP OF TIME AND PROGRAMME IN THE EVENT OF MAINS FAILURE.

DIMENSIONS	90 x 18 x 60 (see drawing below)
CONNECTIONS	4 X Screw terminals
TERMINAL CAPACITY	2.5mm ² Conductor maximum
WEIGHT	110g
POWER CONSUMPTION	1vA @ 230V 50Hz
RESISTIVE LOAD	16 AMPERES
INDUCTIVE LOAD	2 AMPERES (cos Ø 0.6)
MINIMUM LOAD	100mA @ 20v AC/DC
TEMPERATURE RATING	-10T45
ACCURACY	+/- 2.5 sec / day
RUNNING RESERVE	100 HOURS
MINIMUM SWITCHING	1 MINUTE
MANUAL OVERRIDE	ADVANCE ON / TIMED / ADVANCE OFF

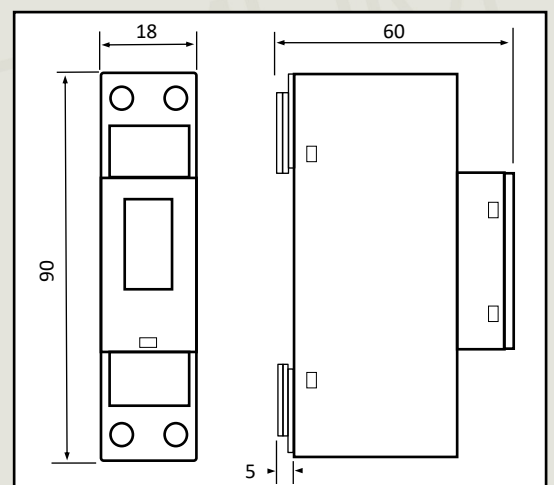

OPTIMUM

TFC GROUP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 www.tfc-group.co.uk