



PRODUCT DATA SHEET


OP - 2PORT28

- 2 PORT MOTORISED VALVE
- 28mm COMPRESSION FITTINGS
- END SWITCH
- REPLACEABLE ACTUATOR
- MANUAL / AUTO LEVER



OP-2PORT28 IS A 2-PORT MOTORISED VALVE, SUPPLIED WITH 28MM COMPRESSION FITTINGS, FOR FLOW CONTROL OF CENTRAL HEATING OR HOT WATER IN 'S PLAN' CENTRAL HEATING SYSTEMS. THE VALVE OPERATES IN CONJUNCTION WITH EITHER A ROOM OR CYLINDER THERMOSTAT; OPENING ON THERMOSTAT DEMAND SIGNAL BY THE ACTION OF A GEARED SYNCHRONOUS MOTOR, AND CLOSING BY A SPRING RETURN MECHANISM. WHEN OPENED A LIMIT SWITCH OPERATES TO SWITCH ON THE HEAT SOURCE. MUST BE INSTALLED ACCORDING TO THE DIRECTION OF FLOW AS INDICATED BY THE ARROW ON THE VALVE BODY. ONLY SUITABLE FOR OPEN VENTED OR SEALED PUMPED SYSTEMS

CONNECTION	5 CORE COLOUR CODED FLEXIBLE CABLE 1 METRE
POWER CONSUMPTION	6W
TEMPERATURE RANGE	5 TO 88 ⁰ C
MAX DIFFERERENTIAL PRESSURE	1 BAR
MAX STATIC PRESSURE	10 BAR
MAX FLUID TEMPERATURE	100 ⁰ C
MANUAL LEVER	YES
REPLACEABLE ACTUATOR HEAD	YES
REPLACEABLE MOTOR	YES

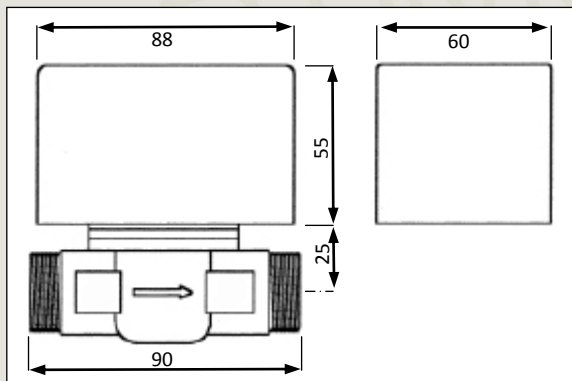

TFC GROUP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 www.tfc-group.co.uk

Prepared for TFC Group By: M. Edmonston

Issue 1: Sept 2018

Page 1 of 1