



## PRODUCT DATA SHEET

### 110 7080

24 HOUR TIME SWITCH

DIN RAIL MOUNTING

BACKLIT DISPLAY



VOLT FREE CHANGEOVER CONTACT

16 (2) AMPERE CONTACT RATING



The Perry Electric 7080 time switch is a Din-rail mounted digital timer, with daily programming featuring 20 ON/OFF programmes. The timer operates a volt-free changeover contact, rated at 16 amperes resistive, 2 amperes inductive. The display is backlit and the real-time display will automatically adjust for the summer-winter time change.

DIMENSIONS	35 x 60 x 90 (see drawing below)
CONNECTIONS	5 X WIRE-PROTECT CAPTIVE SCREW TERMINALS
WEIGHT	160g
RESISTIVE (INDUCTIVE) LOAD	16 (2) AMPERES
LIGHTING LOADS	INCANDESCENT: 2300W; UNCOMPENSATED FLUORESCENT: 1000W PARALLEL FLUORESCENT WITH 70uF COMPENSATION: 500W COMPACT FLUORESCENT: 600W
TEMPERATURE RATING	T50
ACCURACY	+/- 0.5 sec / day
MINIMUM SWITCHING	1 SECOND
MANUAL OVERRIDE	ADVANCE OR FIXED ON / OFF
AUTO SUMMER-WINTER	YES
BATTERY BACK-UP	15 DAY NiMH RECHARGEABLE CELL
PROTECTION RATING	IP 20

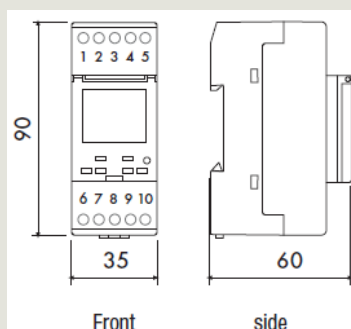

EXCLUSIVELY BY

**TOWER**  
TFC GROUP

TFC GROUP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 [www.tfc-group.co.uk](http://www.tfc-group.co.uk)