

PRODUCT DATA SHEET

110 7281

24 HOUR / 7 DAY TIME SWITCH

TWO CHANNELS

DIN RAIL MOUNTING



BACKLIT DISPLAY

VOLT FREE CHANGEOVER CONTACTS



The Perry Electric 7281 time switch is a Two channel Din-rail mounted digital timer, with 24 hour and seven-day programming featuring 20 ON/OFF programmes with individual or day grouping capability. Each programme can be assigned to channel 1, channel 2, or both channels. The timer operates two volt-free changeover contacts, rated at 16 amperes resistive, 2 amperes inductive. The display is backlit and the real-time display will automatically adjust for the summer-winter time change.

DIMENSIONS	35 x 60 x 90 (see drawing below)
CONNECTIONS	7 X WIRE-PROTECT CAPTIVE SCREW TERMINALS
WEIGHT	160g
RESISTIVE (INDUCTIVE) LOAD	16 (2) AMPERES
LIGHTING LOADS	INCANDESCENT: 2300W; UNCOMPENSATED FLUORESCENT: 1000W PARALLEL FLUORESCENT WITH 70uF COMPENSATION: 500W COMPACT FLUORESCENT: 600W
TEMPERATURE RATING	T50
ACCURACY	+/- 0.5 sec / day
MINIMUM SWITCHING	1 SECOND
MANUAL OVERRIDE	ADVANCE OR FIXED ON / OFF
AUTO SUMMER-WINTER	YES
BATTERY BACK-UP	15 DAY NiMH RECHARGEABLE CELL

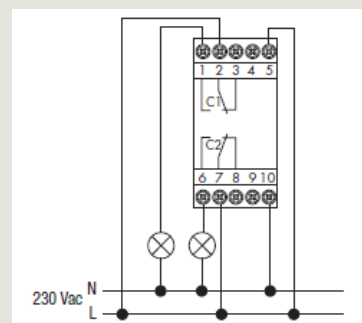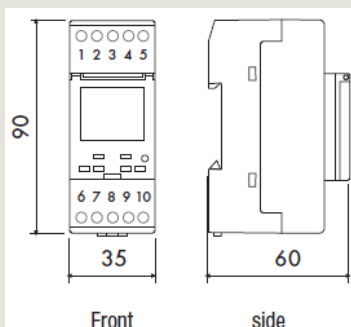

EXCLUSIVELY BY

