




PRODUCT DATA

OP-TIP750

24 HOUR SYNCHRONOUS
PLUG-IN TIME SWITCH

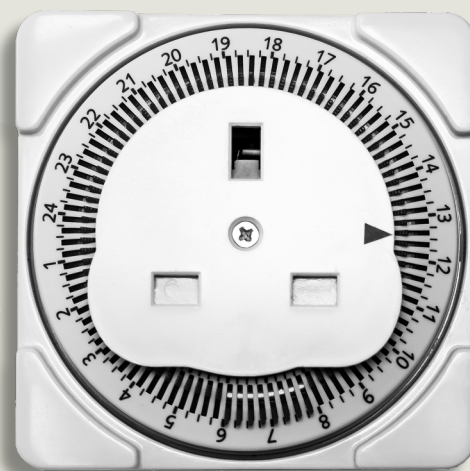

OP-TIP750 IS A CAPTIVE-TAPPET 24-HOUR PLUG-IN TIME SWITCH. EACH TAPPET OPERATES FOR 15 MINUTES. THE TIMER IS SUITABLE FOR USE IN BS1363 SOCKETS. THE 24 HOUR DIAL CONTROLS THE OUTPUT TO A BS1363 COMPLIANT SHUTTERED SOCKET, AND HAS A RESISTIVE RATING OF 13 AMPERES.

DIMENSIONS	130 x 68.5 x 42
WEIGHT	150g
POWER CONSUMPTION	1vA @ 230V 50Hz
RESISTIVE LOAD	13 AMPERES
INDUCTIVE LOAD	2 AMPERES (cos ϕ 0.6)
TEMPERATURE RATING	-10T55
ACCURACY	MAIN SYNCHRONISED (typically +/- 2.5 sec / day)
MINIMUM SWITCHING	15 MINUTES
MANUAL OVERRIDE	TIMED / FIX ON

OPTIMUM



Cert No: RS 30178
QR057

TFC GROUP LLP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 www.tfc-group.co.uk

Prepared for TFC Group LLP By: M. Edmonston

Issue 1: Sept 2018

Page 1 of 1