



TRADE RANGE

Product Code:
TRADE06



MAGNETIC INLINE SCALE INHIBITOR for single appliance protection.

Description

The TRADE06 is a compact environmentally friendly magnetic scale inhibitor that protects an individual appliance from the harmful and costly effects of limescale formation. It is designed to treat water for 'point of use' applications such as electric showers, combination boilers, dishwashers, washing machines and vending machines.

As the incoming water flows through the Magnetic scale inhibitor it passes between powerful ceramic magnets generating a small electrical charge which alters the structure of the hard salts in the water. These salts then remain in solution when the water is heated thus reducing limescale build up.

Once the water has passed through the unit it will eventually revert to it's untreated condition. The TRADE06 inhibitor has been designed to function at flow rates as low as 2 litres per minute, in addition there is no requirement for an earth bonding cable to be fitted across the unit.

POSITIONING

Ensure the unit is installed so as to be readily accessible for examination, or replacement. The unit may be fitted horizontally or vertically. The Magnetic should be installed approximately 1 meter from the appliance to be protected on a cold-water pipe. It may be fitted in either direction vertically or horizontally. Protect from freezing.


CONNECTION

To ensure a leak proof installation, make sure the pipe is cut square with a pipe-cutter even if the pipe run is initially broken into using a hacksaw. Tighten fittings with a 24mm spanner.

ADDITIONAL INFORMATION

This product does not require Earth bonding continuity.

Note: Water utilities cannot be held responsible for the quality of water passed from

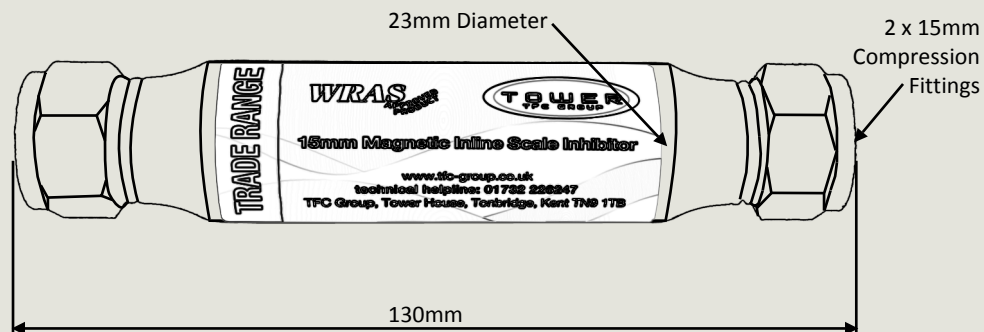

- One year replacement guarantee
- WRAS approved product
- Maximum working pressure: 12 bar at 20°C
- Maximum Temperature: 80°C
- Service life - up to 10 years
- Maximum flow rate: 1.08 l/sec
- No chemicals or power needed
- Easily installed
- No moving parts
- No maintenance required
- 15mm compression fittings
- Dimensions: 130mm x 23mm diameter